



Spectra Precision SP80 GNSS Receiver



The Most Connected GNSS Receiver



CONNECTED
RELIABLE
RUGGED

INNOVATIVE



SP80

SP80 GNSS Receiver

The Spectra Precision SP80 is a next generation GNSS receiver that combines decades of GNSS RTK technology with revolutionary new GNSS processing. Featuring the new 240-channel "6G" chipset combined with the patented Z-Blade technology, the SP80 system is optimized for tracking and processing signals from all GNSS constellations in challenging environments.

As the most connected GNSS receiver in the industry, the SP80 offers a unique combination of integrated 3.5G cellular, Wi-Fi and UHF communications with SMS, email and anti-theft technology.

These powerful capabilities, packaged in an ultra-rugged housing and patented antenna design with unlimited operation time (hot-swappable batteries), make SP80 an extremely versatile turnkey solution.


Key Features

- Patented Z-Blade technology
- 240-channel 6G ASIC
- Hot-swappable batteries
- Internal TRx UHF radio
- 3.5G cellular modem
- Built-in WiFi communication
- SMS and e-mail alerts
- Anti-theft technology
- Backup RTK
- RTK Bridge
- eLevel technology
- CenterPoint® RTX capable



*Patented
inside-the-rod
mounted UHF
antenna design*



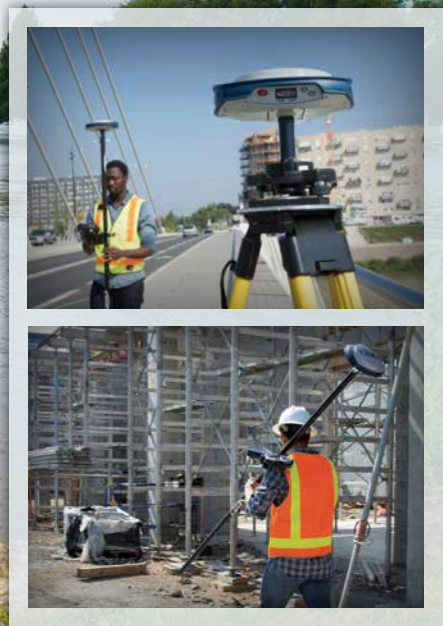

Unique 6G GNSS-centric Technology

Patented Z-Blade processing technology running on a next generation Spectra Precision 240-channel 6G ASIC fully utilizes all 6 GNSS systems: GPS, GLONASS, BeiDou, Galileo, QZSS and SBAS. Unlike GPS-centric technology which requires a minimum number of GPS satellites for GNSS processing, Z-Blades unique GNSS-centric capability optimally combines GNSS signals without dependency on any specific GNSS system; this allows SP80 to operate in GPS-only, GLONASS-only or BeiDou-only mode if needed. In addition, SP80 supports the recently approved RTCM 3.2 Multiple Signal Messages (MSM), a standardized definition for broadcasting all GNSS signals from space, regardless of their constellation. This protects the surveyor's investment well into the future by providing superior performance and improved productivity as new signals become available.

SMS and Email Messaging

SP80 has a unique combination of communication technologies including an integrated 3.5G GSM/UMTS modem, Bluetooth and Wi-Fi connectivity, and optional internal UHF transmit radio. The cellular modem may be used for SMS (text message) and e-mail alerts as well as regular Internet or VRS connectivity. SMS (text messages) can be used to monitor and configure the receiver. Likewise, SP80 can use all available RTK correction sources and connect to the Internet from the field using WiFi hotspots, where available. The internal UHF transmit/receive radio allows for quick and easy setup as a local base station. This saves time and increases the surveyor's efficiency.



Anti-Theft Protection

A unique anti-theft technology secures SP80 when installed as a field base station in remote or public places and can detect if the product is disturbed, moved or stolen. This technology allows the surveyor to lock the device to a specific location

and make it unusable if the device is moved elsewhere. In this case, SP80 will generate an audio alert and show an alert message on its display. Furthermore, a SMS or e-mail will be sent to the surveyor's mobile phone or computer and provides the receiver's current coordinates allowing tracking of its position and facilitating recovery of the receiver. SP80's anti-theft technology provides surveyors with remote security and peace of mind.

The Most Powerful Tool for Reliable Field Use

The SP80's rugged housing, created by Spectra Precision's engineering design lab in Germany, incorporates a host of practical innovations. Dual hot-swappable batteries can be easily exchanged in the field as a one hand operation for an interruption-free working day, ensuring surveyors remain productive until the job is done. The impact-resistant glass-fiber reinforced casing, designed to withstand 2m pole drops and waterproof to IP67, ensures that SP80 can handle the toughest outdoor conditions. The patented UHF antenna, set inside the rugged carbon fiber rod, extends the range of RTK radio performance at the same time as armoring protection. The sunlight-readable display offers instant access to key information like the number of satellites, RTK status, battery charge and available memory. With eLevel technology, the user is able to focus in one place when leveling and measuring as well as automatically store measurements when the receiver is level. These powerful design features combine to make SP80 the most capable, most reliable GNSS receiver, backed by a comprehensive standard 2 year warranty.



The Spectra Precision Experience

With the most advanced and rugged field data collectors from Spectra Precision, surveyors get maximum productivity and reliability every day. Spectra Precision Survey Pro or FAST Survey software is specifically tailored for the SP80 GNSS receiver providing easy-to-use, yet powerful GNSS workflows, letting the surveyor concentrate on getting the job done. Spectra Precision Survey Office Software provides a

complete office suite for post-processing GNSS data and adjusting survey data, as well as exporting the processed results directly back to the field or to engineering design software packages. Combined with Spectra Precision field and office software, SP80 is a very powerful and complete solution.

SP80 Technical Specifications

GNSS Characteristics

- 240 GNSS channels
 - GPS L1C/A, L1P(Y), L2C, L2P(Y), L5
 - GLONASS L1C/A, L1P, L2C/A, L2P, L3
 - Beidou (Phase II) B1, B2
 - Galileo E1, E5a, E5b
 - QZSS L1C/A, L1-SAIF, L1C, L2C, L5
 - SBAS L1C/A, L5 (WAAS, EGNOS, MSAS, GAGAN, SDCM)
 - IRNSS L5
- Patented Z-Blade technology for optimal GNSS performance
 - Full utilization of signals from all 6 GNSS systems (GPS, GLONASS, BeiDou, Galileo, QZSS and SBAS)
 - Enhanced GNSS-centric algorithm: fully-independent GNSS signal tracking and optimal data processing, including GPS-only, GLONASS-only or BeiDou-only solution (Autonomous to full RTK)
 - Fast Search engine for quick acquisition and re-acquisition of GNSS signals
- Patented SBAS ranging for using SBAS code & carrier observations and orbits in RTK processing
- Patented Strobe™ Correlator for reduced GNSS multi-path
- Up to 20 Hz real-time raw data (code & carrier and position output)
- Supported data formats: ATOM, CMR, CMR+, RTCM 2.1, 2.3, 3.0, 3.1 and 3.2 (including MSM), CMRx and sCMRx (rover only)
- NMEA 0183 messages output

Real-Time Accuracy (RMS) ⁽¹⁾⁽²⁾

SBAS (WAAS/EGNOS/MSAS/GAGAN)

- Horizontal: < 50 cm
- Vertical: < 85 cm

Real-Time DGPS position

- Horizontal: 25 cm + 1 ppm
- Vertical: 50 cm + 1 ppm

Real-Time Kinematic Position (RTK)

- Horizontal: 8 mm + 1 ppm
- Vertical: 15 mm + 1 ppm

Real-Time Performance

- Instant-RTK® Initialization
 - Typically 2 sec for baselines < 20 km
 - Up to 99.9% reliability
- RTK initialization range: over 40 km

Post-Processing Accuracy (RMS) ⁽¹⁾⁽²⁾

Static & Fast Static

- Horizontal: 3 mm + 0.5 ppm
- Vertical: 5 mm + 0.5 ppm

High-Precision Static ⁽³⁾

- Horizontal: 3 mm + 0.1 ppm
- Vertical: 3.5 mm + 0.4 ppm

Data Logging Characteristics

Recording Interval

- 0.05 - 999 seconds

Physical Characteristics

Size

- 22.2 x 19.4 x 7.5 cm (8.7 x 7.6 x 3.0 in)

Weight

- 1.17 kg (2.57 lb)

User Interface

- Graphical PMOLED display

I/O Interface

- RS232 serial link
- USB 2.0/UART
- Bluetooth 2.1 + EDR
- WiFi (802.11 b/g/n)
- 3.5G quad-band GSM (850/900/1800/1900 MHz) / penta-band UMTS module (800/850/900/1900/2100 MHz)

Memory

- 2 GB internal memory NAND Flash (1.5 GB user data)
- Over a year of 15 sec. raw GNSS data from 14 satellites
- SD/SDHC internal memory card (up to 32GB)

Operation

- RTK rover & base
- RTK network rover: VRS, FKP, MAC
- NTRIP, Direct IP
- CSD mode
- Post-processing

Environmental Characteristics

- Operating temperature: -40° to +65°C (-40° to +149°F) ⁽⁴⁾
- Storage temperature: -40° to +85°C (-40° to +185°F) ⁽⁵⁾
- Humidity: 100% condensing
- IP67 waterproof, sealed against sand and dust
- Drop: 2m pole drop on concrete
- Shock: ETS300 019
- Vibration : MIL-STD-810F

Power Characteristics

- 2 Li-Ion hot-swappable batteries, 38.5 Wh (2 x 7.4 V, 2600 mAh)
- Battery life time (two batteries): 10 hrs (GNSS On, and GSM or UHF Rx On)
- External DC power: 9-28 V

Standard System Components

- SP80 receiver
- 2 Li-Ion batteries
- Dual battery charger, power supply and international power cord kit
- Tape measure (3.6 m / 12 ft)
- 7 cm pole extension
- USB to mini-USB cable
- Hard case
- 2 year warranty

Optional System Components

- SP80 UHF Kit (410-470 MHz 2W TRx)
- SP80 Field Power Kit
- SP80 Office Power Kit
- Data collectors
 - Ranger 3
 - T41
 - MobileMapper 20
 - ProMark 120
- Field software
 - Survey Pro
 - FAST Survey

- (1) Accuracy and TTFF specifications may be affected by atmospheric conditions, signal multipath, satellite geometry and corrections availability and quality.
- (2) Performance values assume minimum of five satellites, following the procedures recommended in the product manual. High multipath areas, high PDOP values and periods of severe atmospheric conditions may degrade performance.
- (3) Long baselines, long occupations, precise ephemeris used
- (4) At very low temperatures UHF module should not be used in the transmitter mode.
- (5) Without batteries. Batteries can be stored up to +70°C.

Contact Information:

AMERICAS

Spectra Precision Division
10368 Westmoor Drive
Westminster, CO 80021, USA
+1-720-587-4700 Phone
888-477-7516 (Toll Free in USA)

www.spectraprecision.com

EUROPE, MIDDLE EAST AND AFRICA

Spectra Precision Division
Rue Thomas Edison
ZAC de la Fleuriaye - CS 60433
44474 Carquefou (Nantes), France
+33 (0)2 28 09 38 00 Phone

ASIA-PACIFIC

Spectra Precision Division
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269, Singapore
+65-6348-2212 Phone



Please visit www.spectraprecision.com for the latest product information and to locate your nearest distributor.

©2015 Trimble Navigation Limited. All rights reserved. Spectra Precision is a Division of Trimble Navigation Limited. Spectra Precision, the Spectra Precision logo, Ashtech, the Ashtech logo, and Blade are trademarks of Trimble Navigation Limited or its subsidiaries. All other trademarks are the property of their respective owners. (2015/08)

SCAN THIS
CODE FOR MORE
INFORMATION

