

# TRIMBLE R1 GNSS RECEIVER

## KEY FEATURES

**Small, rugged, lightweight** GNSS receiver for great mobility

Flexibility to **choose your data collection device**

**Bluetooth connection** to Trimble handhelds or consumer-grade smart devices

Provides **higher-accuracy** location data

Flexible, professional **data collection in more places**



## MAKE ACCURACY PERSONAL

The Trimble® R1 is a rugged, compact, lightweight GNSS receiver that provides professional-grade positioning information to any connected mobile device using Bluetooth® connectivity. Purpose-built for mapping and GIS professionals in a variety of organizations, including environmental agencies, government departments, and utility companies, the standalone Trimble R1 receiver enables you to collect higher-accuracy location data with the device you already use—whether it is a modern smart device, such as a mobile phone or tablet, or traditional integrated data collection handheld or tablet.

## IMPROVED GNSS POSITIONING—ON ANY DEVICE

For users challenged with collecting high-accuracy location data using their existing consumer-grade devices, the Trimble R1 receiver is the solution. No matter what smart device you choose—from iOS to Android—for collecting GIS data, inspecting, or managing assets, the Trimble R1 lets you achieve a greater level of reliable spatial accuracy than your current smart phone or tablet is able to provide on its own.

Because the Trimble R1 is compatible with a variety of devices, your current technology investments are maximized, all while ensuring you collect reliable higher accuracy data. In addition, the investment made in your Trimble R1 GNSS receiver allows you to upgrade to the latest smart device or share the R1 between multiple devices whenever needed, saving you money and keeping you productive and efficient.

## PROFESSIONAL DATA COLLECTION IN MORE PLACES

Capable of supporting multiple satellite constellations, including GPS, GLONASS, Galileo and BeiDou, the Trimble R1 provides a truly global solution. Delivering GNSS positions in real-time without the need for postprocessing, correction sources such as SBAS, VRS, or RTX networks can be applied to suit your location and desired accuracy—giving you confidence in achieving reliable GNSS information anywhere in the world.

Obtain submeter accuracy by using the Trimble R1 with the optional Trimble ViewPoint™ RTX™ service. Trimble ViewPoint RTX service\* offered with the Trimble R1 provides internet-delivered submeter accuracy wherever cellular communications are available or over satellite L-band, even in remote locations.


## SUPPORT YOUR DAILY GIS WORKFLOWS

The Trimble R1 integrates with the flexible and robust workflows of Trimble Mapping & GIS software—including Trimble TerraFlex™, Trimble TerraSync™, and Trimble Positions™ software—or third-party applications. No matter what mobile device you use, Trimble's professional data collection software means you can be certain your GIS is populated with quality data you can trust.

## BUILT TO WORK THE WAY YOU DO

Weighing just 187 g and measuring at 11.2 cm x 6.8 cm x 2.7 cm, the Trimble R1 can go wherever you go. Easily carry around the Trimble R1 as you perform all of your data collection and asset management tasks. The receiver can be pole-mounted, carried in a vest pocket, or attached to a belt using the optional belt pouch—giving you the flexibility to choose how you use it while keeping you streamlined and cable-free, thanks to wireless Bluetooth connectivity. Plus the all-day battery life means it will keep going as long as you do. Built to last with certified MIL-STD-810 ruggedness and IP65 rating, the Trimble R1 receiver won't quit when the going gets tough.

Flexible and practical, accurate and rugged—the innovative Trimble R1 GNSS receiver delivers professional-level positions to everyone.

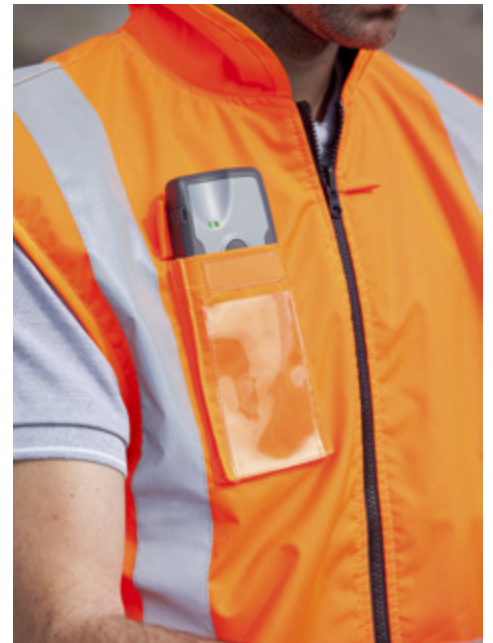

\*RTX available through Trimble applications

# TRIMBLE R1 GNSS RECEIVER

## GNSS

Sensor type ..... L1/G1 GNSS receiver and antenna  
 Systems ..... GPS, GLONASS, Galileo, Beidou, QZSS  
 Channels ..... 44-channel, parallel tracking  
 Correction sources ..... SBAS, ViewPoint RTX, QZSS, VRS  
 SBAS ..... 4-channel, parallel tracking  
 WAAS, EGNOS, MSAS, GAGAN, SBAS ranging  
 Receiver protocols ..... NMEA 0183 v4.00, Binary  
 Update rate ..... 1 Hz  
 Time to first fix ..... 45s typically  
 Reacquisition ..... < 2s  
 Real time correction protocols ..... CMR, CMR+, sCMRx  
 RTCM 2.1, 2.2, 2.3, 3.0, 3.1  
 SBAS accuracy<sup>1</sup> ..... < 100 cm  
 ViewPoint RTX<sup>1</sup> ..... 50 cm HRMS  
 Code DGNSS accuracy (real-time)<sup>1</sup> ..... 75 cm + 1 ppm HRMS  
 Maximum speed ..... 1,850 kph / 1,150 mph / 999 knots  
 Maximum altitude ..... 9,000 m (29,520 ft)

## INTERFACES

Port ..... Bluetooth 2.1 + EDR,  
 USB 2.0 (charge/firmware update)  
 Bluetooth transmission ..... Class 2 (10 m) iAP2 and 2.1 EDR  
 Bluetooth frequency ..... 2.400 - 2.485 GHz  
 Raw measurement data ..... Trimble GSOE, Binary  
 Communication status LED ..... Bluetooth status, GNSS, corrected GNSS  
 Power status LED ..... Charging, charging (full), 3 stage battery status  
 (> 50%, 15 - 50%, < 15%)

## BATTERY AND POWER

Battery type ..... Integrated Lithium-Ion  
 Battery capacity ..... 3.7v 15Wh  
 Battery life ..... 10+ hours  
 Charging time ..... 5 hours (typical, with supplied charger)  
 External antenna voltage output ..... 3 VDC  
 External antenna input impedance ..... 50 Ohms

<sup>1</sup> Accuracy and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. Always follow recommended GNSS data collection practices. Specified ViewPoint RTX accuracy is typically achieved within 10 minutes.

© 2015, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Positions, RTX, TerraFlex, TerraSync, and ViewPoint are trademarks of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. PN 022543-127 (02/15)

## ENVIRONMENTAL

Water/Dust Ingress ..... IP65  
 Temperature (MIL-STD-810G)  
 Operation ..... -20 °C to +60 °C (-4 °F to +140 °F)  
 Storage ..... -30 °C to +70 °C (-22 °F to +158 °F)  
 Drop shock (non-operating) ..... MIL-STD-810G Method 516.5 Procedure IV  
 1.2 m (4 ft) to plywood over concrete  
 Vibration ..... MIL-STD-810G Method 514.5 Procedure I Category 24  
 Relative humidity ..... MIL-STD-810G Method 507.6  
 95% non-condensing  
 Altitude rating ..... MIL-STD-810G Method 500.5  
 Maximum storage altitude ..... 12,192 m (40,000 ft)  
 Maximum operational altitude ..... 9,000 m (29,520 ft)

## MECHANICAL

Enclosure dimensions ..... 11.2 x 6.8 x 2.7 cm (4.0 x 2.6 x 0.8 in.)  
 Weight ..... 187 g (0.4 lb)  
 Power connector ..... Micro-B USB female  
 External antenna connector ..... SMB female

## INTERNAL ANTENNA

Frequency range ..... GPS L1 and GLONASS L1

## SUPPORTED PLATFORMS

iOS 7, iOS 8, Android (4.1 or greater), Windows (7 or greater), WEHH (6.5x)

## COMPLIANCE

FCC Part 15 (Class device), CE Mark, RoHS

## IN THE BOX

- Trimble R1 GNSS receiver
- AC Power adaptor/charger
- USB data cable
- Belt pouch/clip
- Documentation

## SOFTWARE COMPATIBILITY

Please refer to the Product Compatibility list.  
 ([www.trimble.com/mappingGIS/productcompatibility](http://www.trimble.com/mappingGIS/productcompatibility))

"Made for iPhone" and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPhone or iPad respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone or iPad may affect wireless performance.

iPad, iPhone and Retina are trademarks of Apple Inc., registered in the U.S. and other countries. iPad mini is a trademark of Apple Inc.

Specifications subject to change without notice.



TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

## NORTH AMERICA

Trimble Navigation Limited  
 10368 Westmoor Dr  
 Westminster CO 80021  
 USA

## EUROPE

Trimble Germany GmbH  
 Am Prime Parc 11  
 65479 Raunheim  
 GERMANY

## ASIA-PACIFIC

Trimble Navigation  
 Singapore Pty Limited  
 80 Marine Parade Road  
 #22-06, Parkway Parade  
 Singapore 449269  
 SINGAPORE

